



PolyXeta®2

Calibration Adapter Cal01-PX2 for PX2 Sensors

Calibration adapter for comfortable gas supply to sensors of the PX2 series.

APPLICATION

The PolyXeta®2 calibration adapter Cal01-PX2 is used for the targeted supply of zero and test gases to the sensor head.

FEATURES

- Suitable for all gases
- Easy to use
- Perfect coverage of the sensor head
- Necessary for perfect calibration



PolyXeta®2 calibration adapter with tube

SPECIFICATIONS

Cap	
Material	Stainless steel
Dimensions (D x G)	25 mm x 40 mm (D x G) (0.98 in. x 1.57 in.), see fig. 1
Internal thread	M30 x 1,5
Hose	
Material	PVC-P polyvinyl chloride
Temperature range	-20 °C to +60 °C (-4 °F to 140 °F)
Length	1 m (39.37 in.)

ORDERING INFORMATION

Cal01-PX2 Calibration adapter for PX2 sensors

DIMENSIONS

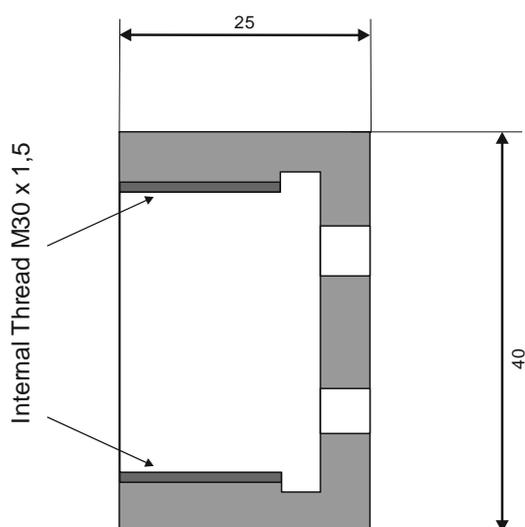


Fig. 1 Dimensions of the cap



MSR-Electronic GmbH ::: Würdinger Str. 27 & 27a ::: 94060 Pocking ::: Germany

Technical changes and errors reserved.

Up-to-date data sheets and user manuals can be found in the download area of www.msr-24.com.

PolyXeta® is a registered trademark of MSR Electronic GmbH.



PolyXeta®2

Stainless Steel Splash Protection SplashGuard SG-PX2 for PX2 Sensors

Stainless steel cap for protecting the PX2 sensor against splash water.

The splash guard is screwed onto the external thread at the end of the sensor head by hand. When properly mounted, the SplashGuard protects the sensor from rain and splash water from all directions.

The gas inlet at the bottom of the SplashGuard offers the possibility to calibrate the sensor with the SplashGuard mounted. This facilitates the calibration during maintenance of the device, since the protection cap does not have to be dismantled beforehand. The gas supply (reaction time) is not affected by the splash guard.



PolyXeta®2 SplashGuard

APPLICATION

The SplashGuard is used for gas warning systems that are installed outdoors, unprotected from weather influences. It can also be used to protect the sensor during cleaning.

FEATURES

- Protection against rain, splash water and other weather conditions
- Easy installation
- Assembly and disassembly possible at any time
- Calibration possible through provided gas inlet



Sensor & stainless-steel splash guard

SPECIFICATIONS

Physical

Material	Stainless steel
Dimensions	38 x 55 mm (D x H) (1.5 in. x 2.17 in.)
Protection class	IP 66

ORDERING INFORMATION

SG-PX2 SplashGuard for PX2 sensors



MSR-Electronic GmbH ::: Würdinger Str. 27 & 27a ::: 94060 Pocking ::: Germany

Technical changes and errors reserved.

Up-to-date data sheets and user manuals can be found in the download area of www.msr-24.com.

PolyXeta® is a registered trademark of MSR Electronic GmbH.